



Natural Wood (NL) trim finish

2341 LED

The 2341 features a matte-white acrylic drum with a modern crossbar constructed of real oak wood. The crossbar is offered in your choice of a clear coated Natural finish and a variety of our standard painted finishes.

Perfect for commercial and residential corridors, units, common areas and more. Refer to model 2601 for a suspended version of this product.

TRIM FINISHES



CROSSBAR SURFACE

STANDARD SPECIFICATIONS

PAN

Cold rolled 22 GA steel, formed in a die, finished in a powder coat high reflectance white paint. The pan features weld nuts for a "twist and hold" installation of the diffuser.

DIFFUSER

The drum features a high quality UV stabilized white acrylic outer shell. The base (bottom) of the drum is constructed with high transmission white acrylic. The trim is constructed from 5/8" square solid oak and is available in natural wood or select painted finishes. The fixture can be cleaned with a damp cloth and mild detergent if needed.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
Amperage rated @ 110V input
Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

- 15 Size: R11 - 11W nominal, .09 A input - 1619 lm. Dimmable (0-10V).
- 15 Size: R18 - 18W nominal, .15 A input - 2588 lm. Dimmable (0-10V).
- 15 Size: R22 - 22W nominal, .19 A input - 3050 lm. Dimmable (0-10V).
- 20 Size: R23 - 23W nominal, .19 A input - 2977 lm. Dimmable (0-10V).
- 20 Size: R34 - 34W nominal, .28 A input - 4387 lm. Dimmable (0-10V).
- 20 Size: R49 - 49W nominal, .41 A input - 5828 lm. Dimmable (0-10V).
- 24 Size: R23 - 23W nominal, .19 A input - 3102 lm. Dimmable (0-10V).
- 24 Size: R34 - 34W nominal, .28 A input - 4569 lm. Dimmable (0-10V).
- 24 Size: R49 - 49W nominal, .41 A input - 6071 lm. Dimmable (0-10V).
- 30 Size: R23 - 23W nominal, .19 A input - 2954 lm. Dimmable (0-10V).
- 30 Size: R34 - 34W nominal, .28 A input - 4352 lm. Dimmable (0-10V).
- 30 Size: R49 - 49W nominal, .41 A input - 5782 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Sizes 24"+ are further anchored to ceiling at three points for additional support (anchoring hardware by others).

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

ORDERING INFORMATION

2341 -

Model 2. 3. 4. 5. 6. (if required)

2. SIZE

- 15 15" dia.
- 20 19.25" dia.
- 24 24" dia.
- 30 30" dia.

3. TRIM FINISH

- BL** Black
- BZ** Bronze
- BW** Chestnut Brown
- GM** Gun Metal
- MB** Metallic Bronze
- MG** Metallic Gold
- NL** Natural Wood
- NT** Nickel Tone
- PL** Platinum
- WH** White

4. WATTAGE

- 15 SIZE**
- R11** 11W R Series LED
 - R18** 18W R Series LED
 - R22** 22W R Series LED

20, 24, 30 SIZE

- R23** 23W R Series LED
- R34** 34W R Series LED
- R49** 49W R Series LED

5. COLOR TEMPERATURE



- 35K** 3500K standard color temperature
- 27K** 2700K color temperature
- 30K** 3000K color temperature
- 40K** 4000K color temperature

6. AVAILABLE OPTIONS

- 90R⁰** 90 CRI (30K & 35K only)
- BAC¹** Buy American Compliant
- BBI^{2*}** Integral Battery Backup (8W) (Adds 1.5" to depth) (15 & 20 sizes only)
Battery must be connected to continuous power supply within 7 Mo. of shipping. See Warranty Note 3.
- BLD^{3**}** Bi-Level Dimming
- DTR⁴** Triac (Line Voltage) Dimming (120V)
- ES⁶** ENERGY STAR® (Not available in 90 CRI)
- EXT** Extended Housing (Intended to match BBI extension) (Adds 1.5" to depth) (15 & 20 sizes only)
- FCL⁷** French Canadian Labels
- OCC⁸** Occupancy Sensor
- T24⁹** Title 24 JA8 Compliant (30K & 35K only)

-Contact factory for Battery Backup in larger sizes.

PROJECT:
MODEL #:
FIXTURE TYPE:

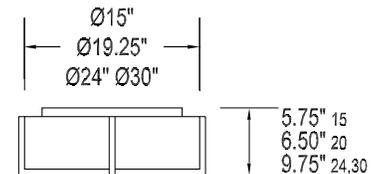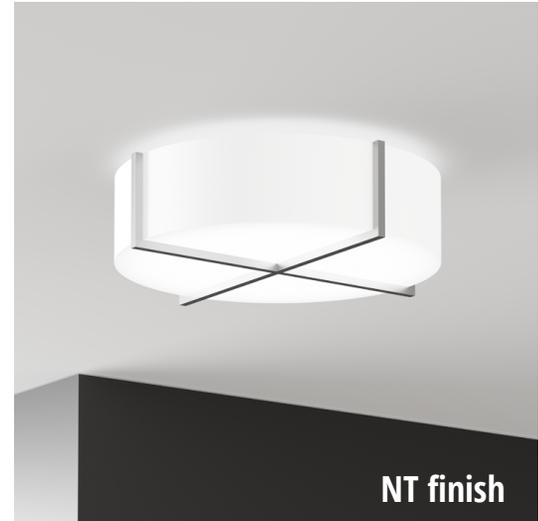

DAMP



Universal Footnotes (only applies if option is listed on spec sheet): (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with ES. (10) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** *BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F. **BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Configurable via onboard dip switches.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.