




BL finish

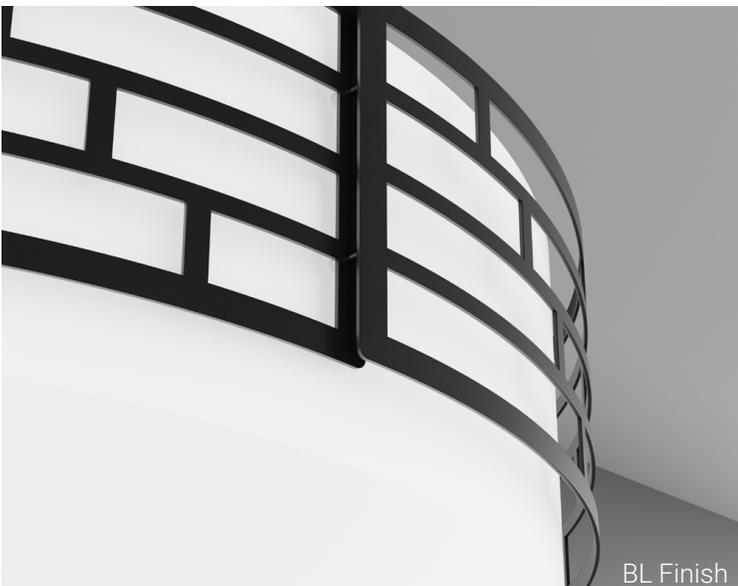

BL Finish

2440 LED

The Outline series is constructed of a low-profile white acrylic drum, with four laser cut cold rolled steel decorative trim pieces assembled to its outer wall. LED assembly (housing) covers the entire top surface of the drum to minimize dust/debris entry. Perfect for open office layouts, conference rooms, schools/libraries, hotel common areas, and more.

Refer to model #: 2640 for a suspended version of this product.

OUTLINE SURFACE

STANDARD SPECIFICATIONS - 2440 SURFACE MOUNT

DIFFUSER

6" h low-profile white acrylic drum, with four laser cut cold rolled steel decorative trim pieces assembled to its outer wall. The base (bottom) of the diffuser is constructed of high transmission matte white acrylic.

HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white. The housing covers the entire top surface of the drum. No need for top cover.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 90+ CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs Amperage rated @ 110V input. Operating ambient temperature: -20°C / -4°F - 40°C / 104° F Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

LOW OUTPUT

26": H30 - 30W nominal, .27 A input - 3850 lm. Dimmable (0-10V).

38": H70 - 70W nominal, .59 A input - 7525 lm. Dimmable (0-10V).

50": H110 - 110W nominal, .94 A input - 11970 lm. Dimmable (0-10V).

HIGH OUTPUT

26": H63 - 63W nominal, .53 A input - 6990 lm. Dimmable (0-10V).

38": H136 - 136W nominal, 1.20 A input - 15050 lm. Dimmable (0-10V).

50": H215 - 215W nominal, 1.86 A input - 23945 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Hardware included. Trim pieces (4) around shade are field-installed to minimize damage in transit. Refer to model #: 2640 for a suspended version of this product.


WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:
MODEL #:
FIXTURE TYPE:



24" Size, BL Finish

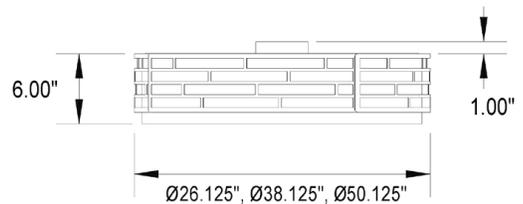

ORDERING INFORMATION

2440	-	-	-	-	-	-
Model	2.	3.	4.	5.	6. (if required)	

2. SIZE	3. WATTAGE	4. TRIM FINISH	5. COLOR TEMPERATURE	6. AVAILABLE OPTIONS
26 26" dia.	26 SIZE	BL Black	35K 3500K standard color temperature	BAC ¹ Buy American Compliant
38 38" dia.	H30 30W H Series LED	BU Pastel Blue (RAL 5024)	30K 3000K color temperature	BBI ^{2*} Integral Battery Backup (8W) (adds 0.75" to depth)
50 50" dia.	H63 63W H Series LED	BZ Bronze	40K 4000K color temperature	Battery must be connected to continuous power supply within 7 Mo. of shipping. See Warranty Note 3 .
	38 SIZE	GN Pastel Green (RAL 6019)		DTR ⁴ Triac (Line Voltage) Dimming (120V)
	H70 70W H Series LED	MG Metallic Gold		FCL ⁷ French Canadian Labels
	H136 136W H Series LED	NT Nickel Tone		
	50 SIZE	RD Red (RAL 3020)		
	H110 110W H Series LED	YL Yellow (RAL 1018)		
	H215 215W H Series LED	WH White		

Universal Footnotes (only applies if option is listed on spec sheet): (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with ES. (10) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** *BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F. **BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Configurable via onboard dip switches. **Specifications and dimensions subject to change without notice.** Consult your Brownlee Lighting representative for availability and ordering information.

