



Nickel Tone (NT) finish

2454 LED

The 2454 LED close-to-ceiling pendant pairs nicely with the 2654 LED traditional pendant and the two models are often used in the same space. This series offers a balance between traditional and contemporary, making it perfect for a variety of spaces from lobbies and entryways to foyers and corridors in applications such as libraries, schools, hotels and more. This unit provides a generous amount of indirect uplight in addition to downlight.

FINISHES



FULTON

STANDARD SPECIFICATIONS

BOWL

Smooth UV stabilized white acrylic. The 24" bowl is formed from 0.188" material, while the 30" bowl utilizes 0.250" stock.

TRIM

The trim consists of a formed, cold rolled steel ceiling canopy, stainless steel aircraft cables, three solid brass finials, and a steel stem.

HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
 Amperage rated @ 110V input
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.
 24 Size: R23 - 23W nominal, .19 A input - 2359 lm. Dimmable (0-10V).
 24/30 Size: R34 - 34W nominal, .28 A input - 3475 lm. Dimmable (0-10V).
 24/30 Size: R49 - 49W nominal, .41 A input - 4617 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included.

FINISH

The 2454 series is available in all Brownlee paint finishes as a standard offering.


WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:
MODEL #:
FIXTURE TYPE:



NT finish

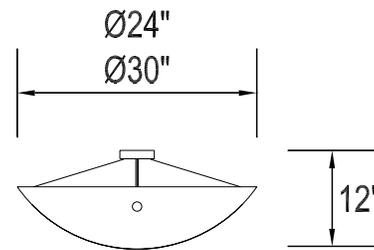

ORDERING INFORMATION

2454 - Model - 2. - 3. - 4. - 5. - 6. (if required)

2. SIZE	3. FINISH	4. WATTAGE	5. COLOR TEMPERATURE	6. AVAILABLE OPTIONS
24 24" dia. 30 30" dia.	STANDARD BL Black BZ Bronze GM Gun Metal MB Metallic Bronze MG Metallic Gold NT Nickel Tone PL Platinum WH White CUSTOM Provide color sample or RAL code to match	24 SIZE R23 23W R Series LED R34 34W R Series LED R49 49W R Series LED 30 SIZE R34 34W R Series LED R49 49W R Series LED	35K 3500K standard color temperature 27K 2700K color temperature 30K 3000K color temperature 40K 4000K color temperature	90R⁹ 90 CRI (30K & 35K only) BAC¹ Buy American Compliant BLD³ Bi-Level Dimming DTR⁴ Triac (Line Voltage) Dimming (120V) ES⁶ ENERGY STAR® (Not available in 90 CRI) FCL⁷ French Canadian Labels OCC⁸ Occupancy Sensor

Universal Footnotes (only applies if option is listed on spec sheet): (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JAB labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with ES. (10) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** *BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F. **BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Configurable via onboard dip switches.
Specifications and dimensions subject to change without notice.
 Consult your Brownlee Lighting representative for availability and ordering information.