



Nickel Tone (NT) finish

2456 LED

The 2456 LED close-to-ceiling pendant pairs nicely with the 2656 LED traditional pendant and the two models are often used in the same space. This series offers a balance between traditional and contemporary, making it perfect for a variety of spaces from lobbies and entryways to foyers and corridors in applications such as libraries, schools, hotels and more. This unit provides a generous amount of indirect uplight in addition to downlight.

FINISHES



SALEM

STANDARD SPECIFICATIONS

BOWL

Smooth UV stabilized white acrylic. The 30" bowl is formed from 0.188" material.

TRIM

The 36" trim consists of a spun aluminum trim ring, a formed, cold rolled steel ceiling canopy, stainless steel aircraft cables, and a steel stem.

HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
 Amperage rated @ 110V input
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.
 36 Size: R34 - 34W nominal, .28 A input - 3475 lm. Dimmable (0-10V).
 36 Size: R49 - 49W nominal, .41 A input - 4617 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included.

FINISH

The 2456 series is available in all Brownlee paint finishes as a standard offering.


WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:
MODEL #:
FIXTURE TYPE:



NT finish

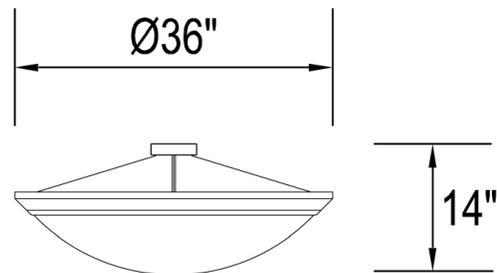

DAMP



ORDERING INFORMATION

2456

Model 2. 3. 4. 5.

2. FINISH

STANDARD

- BL** Black
- BZ** Bronze
- GM** Gun Metal
- MB** Metallic Bronze
- MG** Metallic Gold
- NT** Nickel Tone
- PL** Platinum
- WH** White

CUSTOM

Provide color sample or RAL code to match

3. WATTAGE

- R34** 34W R Series LED
- R49** 49W R Series LED

4. COLOR TEMPERATURE

- 35K** 3500K standard color temperature
- 27K** 2700K color temperature
- 30K** 3000K color temperature
- 40K** 4000K color temperature

5. AVAILABLE OPTIONS

- 90R⁰** 90 CRI (30K & 35K only)
- BAC¹** Buy American Compliant
- BLD³** Bi-Level Dimming
- DTR⁴** Triac (Line Voltage) Dimming (120V)
- ES⁶** ENERGY STAR® (Not available in 90 CRI)
- FCL⁷** French Canadian Labels
- OCC⁸** Occupancy Sensor
- T24⁹** Title 24 JA8 Compliant (30K & 35K only)

Universal Footnotes (only applies if option is listed on spec sheet): (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with ES. (10) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** *BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F. **BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Configurable via onboard dip switches.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.