



Natural Wood (NL) trim finish



Natural Wood (NL) trim finish

2601 LED

The 2601 features a matte-white acrylic drum with a modern crossbar constructed of real oak wood. The crossbar is offered in your choice of a clear coated Natural finish and a variety of our standard painted finishes.

Perfect for common areas, offices, conference rooms, libraries, lobbies, corridors and more. Refer to model 2341 for a flush mount version of this product.

TRIM FINISHES



CROSSBAR PENDANT

STANDARD SPECIFICATIONS

DIFFUSER

The drum features a high quality UV stabilized white acrylic outer shell. The base (bottom) of the drum is constructed with high transmission white acrylic. The trim is constructed from 5/8" square solid oak and is available in natural wood or select painted finishes. The fixture can be cleaned with a damp cloth and mild detergent if needed.

HOUSING

Formed, cold rolled steel design, finished in a high reflectance white powder coat.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
Amperage rated @ 110V input
Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

24 Size: R34 - 34W nominal, .28 A input - 4569 lm. Dimmable (0-10V).

24 Size: R49 - 49W nominal, .41 A input - 6071 lm. Dimmable (0-10V).

30 Size: R34 - 34W nominal, .28 A input - 4352 lm. Dimmable (0-10V).

30 Size: R49 - 49W nominal, .41 A input - 5782 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included.

SUSPENSION SYSTEM

The 2601 Series is available in multiple colors and four suspension methods:

CC1 - The **Cord & Single Cable** suspension is a versatile option. Both the power cord and aircraft cable are field trimmed for mounting, with additional options for up to 10' and 20' drops.

CC3 - The **Cord & Three Cable** mounted system offers the modern alternative. Both the power cord and aircraft cables are field trimmed for mounting, with additional options for up to 10' and 20' drops.

SCM - The **Stem & Cable Mount** adds a contemporary flair to the classic look. The standard overall height (OAH) can be extended with stem sections and aircraft cable that are field trimmed to fit the application - see accessories section.

SSM - The standard **Single Stem Mount** traditional pendant style. The SSM has a standard OAH, with additional stem sections available in 1' and 2' lengths to extend the drop - see accessories section. Stem additions include coupling, and are field installed.

WARRANTY


5 year limited warranty on this LED product.

ORDERING INFORMATION

PROJECT:
MODEL #:
FIXTURE TYPE:



NT suspension finish, NT trim finish, CC1 suspension

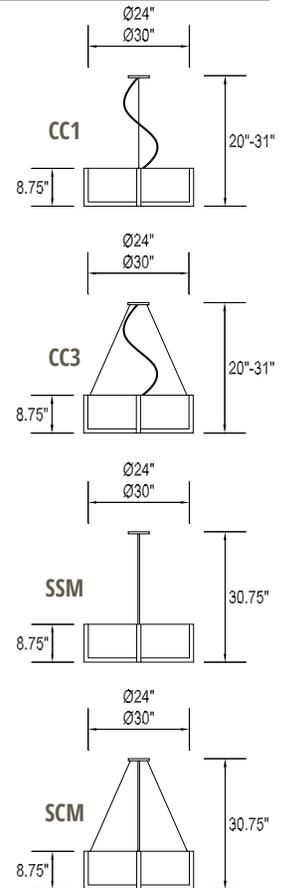

2601		2.		3.		4.		5.		6.		7.		8. (if required)	
Model															
2. SIZE		4. WATTAGE		6. SUSPENSION		8. AVAILABLE OPTIONS									
24	24" dia.	R34	34W R Series LED	CC1	Cord & Single Cable	90R ⁰	90 CRI (30K & 35K only)								
30	30" dia.	R49	49W R Series LED	CC3	Cord & Three Cable	BAC ¹	Buy American Compliant								
3. SUSPENSION FINISH		5. TRIM FINISH		7. COLOR TEMPERATURE		CE1	3' - 10' Cord/Cable Extension (CC1 & CC3 only)								
CC1 & CC3		BL Black		35K	3500K standard color temperature	CE2	10' - 20' Cord/Cable Extension (CC1 & CC3 only)								
BL Black		BZ Bronze		27K	2700K color temperature	DTR ⁴	Triac (Line Voltage) Dimming (120V)								
NT Nickel Tone		BW Chestnut Brown		30K	3000K color temperature	ES ⁶	ENERGY STAR [®] (Not available in 90 CRI)								
WH White		GM Gun Metal		40K	4000K color temperature	FCL ⁷	French Canadian Labels								
SCM & SSM		MB Metallic Bronze				T24 ⁹	Title 24 JA8 Compliant (30K & 35K only)								
BL Black		MG Metallic Gold													
BZ Bronze		NL Natural Wood													
GM Gun Metal		NT Nickel Tone													
MB Metallic Bronze		PL Platinum													
MG Metallic Gold		WH White													
NT Nickel Tone															
PL Platinum															
WH White															

ACCESSORIES (field installed - order separately)	
390001xx	SCM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)
390002xx	SSM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)
320029WHA	Top Cover Set: 24 size, White Acrylic
320030WHA	Top Cover Set: 30 size, White Acrylic

Universal Footnotes (only applies if option is listed on spec sheet): (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with ES. (10) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** *BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F. **BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Configurable via onboard dip switches. **Specifications and dimensions subject to change without notice.**

Consult your Brownlee Lighting representative for availability and ordering information.