



Nickel Tone (NT) finish, Single Stem Mount (SSM) suspension

**2658 LED**

The 2658 LED features a clean and minimal suspension system which makes this unit a good fit for a variety of spaces from lobbies and entryways to foyers and corridors in applications such as libraries, schools, hotels and more. Two suspension styles to choose from. This unit provides a generous amount of indirect uplight in addition to downlight.

**FINISHES**



Nickel Tone (NT) finish, Triple Stem Mount (TSM) suspension

# BASIN

## STANDARD SPECIFICATIONS

### BOWL

Smooth UV stabilized white acrylic. The 24" bowl is formed from 0.188" material, while the 30" bowl utilizes 0.250" stock.

### TRIM

The trim consists of a formed, cold rolled steel ceiling canopy, steel stems, and a solid brass decorative finial.

### HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white.

### LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs  
 Amperage rated @ 110V input  
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.  
 C24 - 23W nominal, .20 A input - 2958 lm. Dimmable (0-10V).  
 C37 - 35W nominal, .30 A input - 4460 lm. Dimmable (0-10V).  
 C49 - 45W nominal, .40 A input - 5916 lm. Dimmable (0-10V).

### MOUNTING

Directly to j-box (by others). Mounting hardware included.


### FINISH

The 2658 series is available in all Brownlee paint finishes as a standard offering.

### WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

<b>PROJECT:</b>
<b>MODEL #:</b>
<b>FIXTURE TYPE:</b>

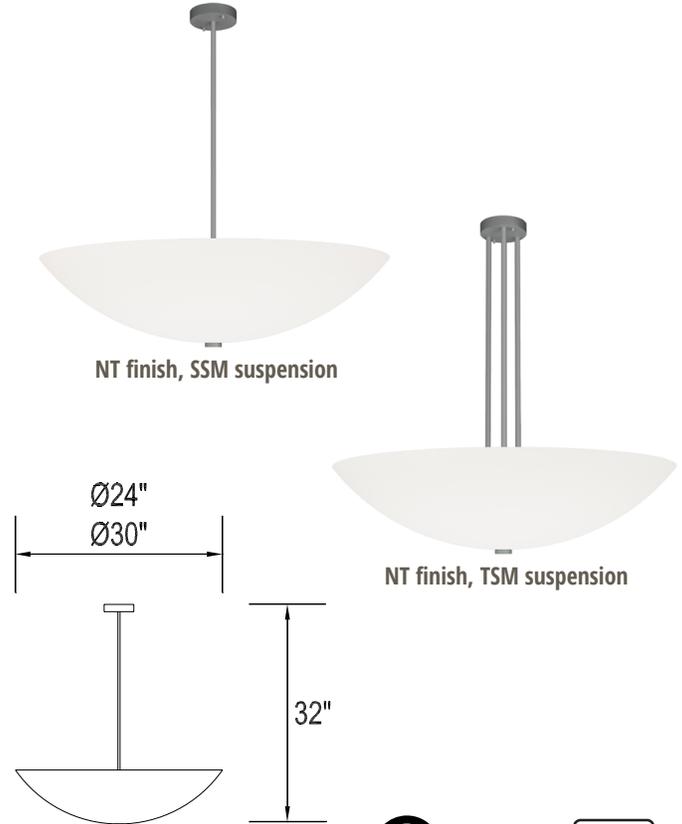

**DAMP**



## ORDERING INFORMATION

**2658** - Model - 2. - 3. - 4. - 5. - 6. - 7. (if required)

2. SIZE	3. FINISH	4. WATTAGE	5. SUSPENSION	6. COLOR TEMPERATURE	7. AVAILABLE OPTIONS
24 24" dia.	<b>STANDARD</b> BL Black BZ Bronze GM Gun Metal MB Metallic Bronze MG Metallic Gold NT Nickel Tone PL Platinum WH White  <b>CUSTOM</b> Provide color sample or RAL code to match	<b>24 SIZE</b> C24 23W C Series LED C37 35W C Series LED C49 45W C Series LED  <b>30 SIZE</b> C37 35W C Series LED C49 45W C Series LED	<b>SSM</b> Single Stem Mount <b>TSM</b> Triple Stem Mount	<b>35K</b> 3500K standard color temperature <b>27K</b> 2700K color temperature <b>30K</b> 3000K color temperature <b>40K</b> 4000K color temperature	<b>90R<sup>0</sup></b> 90 CRI (3000K only) <b>BAC<sup>1</sup></b> Buy American Compliant <b>DTR<sup>4</sup></b> Triac (Line Voltage) Dimming (120V) <b>ES<sup>5</sup></b> ENERGY STAR <sup>®</sup> (Not available in 90 CRI) <b>FCL<sup>7</sup></b> French Canadian Labels <b>SVL</b> Swivel Canopy (SSM) only <b>T24<sup>9</sup></b> Title 24 JAB Compliant (C24 & C49 in 3000K only)

## ACCESSORIES (FIELD INSTALLED)

ORDERING NUMBER	DESCRIPTION
390002xx	Stem Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx). Triple Stem Mount (TSM) requires three sets.

**Notes:** (0) 90R - cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD or T24. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC. (8) OCC - integral ON/OFF occupancy sensor. (9) T24 - includes JAB labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with DTR or ES. (10) BBS - cannot be combined with BLD, ECW, EXT, or OCC. (11) PCH/PC4 - cannot be combined with BLD or OCC.  
**Add'l Notes:** \*BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. \*\*BLD - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50%, 30%, 20% or 10%. 3: Remain in continuous dimmed state or turn off after set period.

**Specifications and dimensions subject to change without notice.**  
 Consult your Brownlee Lighting representative for availability and ordering information.



REVISED  
2020.12.23