



1110 LED

Experience a new level of customization with Hover Acoustic. Floating spun aluminum trim in your choice of powder coat, subtle indirect illumination, and a touch of acoustic PET felt available in a variety of colors. Two sizes, 12.5" & 17.5", with an impressive low-profile projection of only two inches. Hover is an excellent accent for lobbies and common areas in commercial, retail, and hospitality environments. Refer to Model #: 1108 for non-acoustic version with higher outputs.

FRONT HOUSING (POWDER COAT)



REAR ACOUSTIC (PET FELT)



HOVER ACOUSTIC

STANDARD SPECIFICATIONS

HOUSING + CANOPY + ACOUSTIC ACCESSORIES

Spun aluminum housing (front trim) and canopy, powder coated in your choice of finish. Acoustic PET felt: 9mm thick, 100% polyester (60% post-consumer recycled content), passes CDPH V1.2 standard for low VOC emissions.

DIFFUSER

UV stabilized frosted acrylic.

LED PERFORMANCE

120-277V. 3500K standard, 90+ CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs Amperage rated @ 110V input. Operating ambient temperature: -20°C / -4°F - 35°C / 95°F

Delivered lumens shown in Smoke (SMK) Acoustic / 3500K.
Acoustic color/reflectivity may affect output.

13 Size: Q22 - 22W nominal, .19 A input - 535 lm. Dimmable (0-10V).

18 Size: Q19 - 19W nominal, .16 A input - 565 lm. Dimmable (0-10V).

Note: Contact factory for possible output modifications.

MOUNTING

Fixture mounts directly to j-box (by others). Extended screwdriver shaft required. Acoustic mounts flush against flat surface via provided adhesive pads (removable, won't damage surface). Indoors only. Wall mount only.

FINISH

Housing and canopy are available in all Brownlee powder coat finishes as a standard offering. Acoustic accessory is offered in select colors. Custom acoustic colors available but may be subject to availability and/or MOQ - contact factory.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

NON-ACOUSTIC VERSION

Refer to Model #: 1108 for this product minus acoustic trim and increased outputs.


PROJECT:

MODEL #:

FIXTURE TYPE:



SBA Acoustic

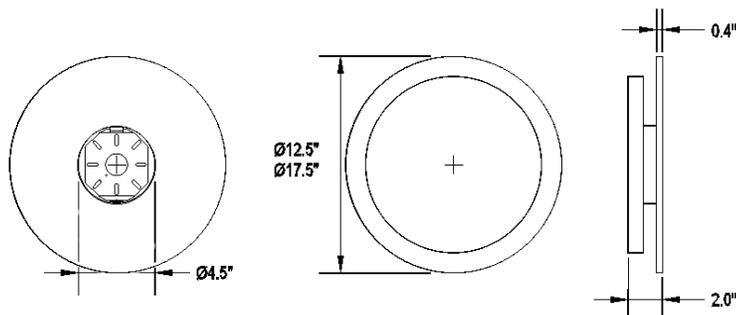

DAMP



ORDERING INFORMATION

1110

Model 2. 3. 4. 5. 6. 7.

2. SIZE

Acoustic trim outside diameter.

- 13 12.5" dia.
- 18 17.5" dia.

3. FINISH

Applies to front housing and canopy (powder coat).

- WH White
- BL Black
- BU Pastel Blue (RAL 5024)
- GN Pastel Green (RAL 6019)
- MG Metallic Gold
- NT Nickel Tone
- OR Florida Orange
- RD Red (RAL 3020)
- YL Yellow (RAL 1018)

4. WATTAGE

- 13 SIZE
- Q22 22W Q Series LED
- 18 SIZE
- Q19 19W Q Series LED

5. ACOUSTIC

Applies to PET felt accessory.

- BLK Black Acoustic
- GGR Green Grass Acoustic
- ORA Orange Acoustic
- PEW Pewter Acoustic
- PUR Purple Acoustic
- RED Red Acoustic
- SBA Sea Blue Acoustic
- SMK Smoke Acoustic
- YEL Yellow Acoustic

Color offering subject to change.

Don't want the acoustic?
Refer to Model #: 1108.

6. COLOR TEMP

- 27K 2700K
- 30K 3000K
- 35K 3500K standard

Contact factory for 4000K. May become available in 2025.

7. AVAILABLE OPTIONS

- AMF Antimicrobial Finish (BL, NT, WH only) (See AMF note)
- BAC¹ Buy American Compliant
- DTR⁴ Triac (Line Voltage) Dimming (120V)
- FCL⁷ French Canadian Labels

AMF Note: Antimicrobial powder coat is applied to the exposed metal fixture parts and can inhibit the growth of mildew and spoilage causing microbes on the finish. **AMF does NOT apply to acoustic accessories or diffuser.**

Universal Footnotes (only applies if option is listed on spec sheet): (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. (1) BAC/BAB - www.brownlee.com/resources/usa. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JAB labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with ES. (10) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** *BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F. **BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Configurable via onboard dip switches.

Specifications and dimensions subject to change without notice.










Consult your Brownlee Lighting representative for availability and ordering information.

HOVER ACOUSTIC

PROJECT:
MODEL #:
FIXTURE TYPE:

ACOUSTIC COLOR GUIDE

9mm PET Felt - 60% post-consumer recycled content.
 NRC rating: 0.3+ (Type A Mounting)
 Acoustic Surface Area: 13" Size: 0.75 SQ FT, 18" Size: 1.56 SQ FT

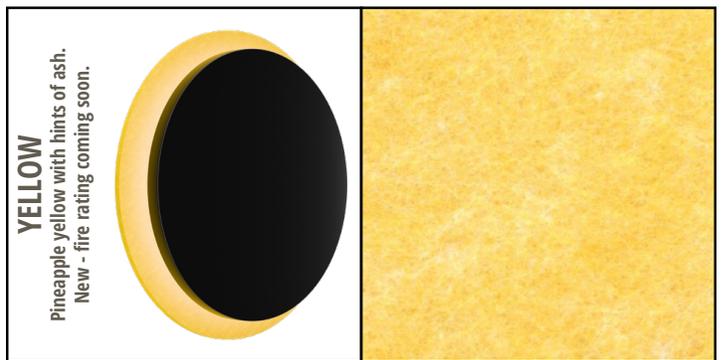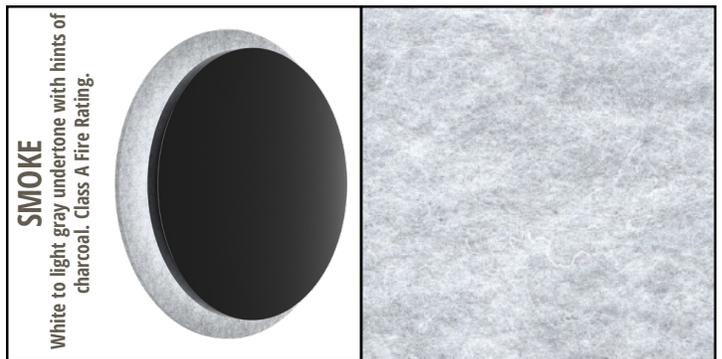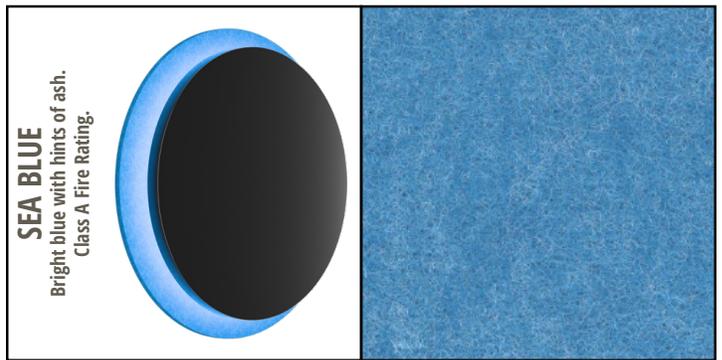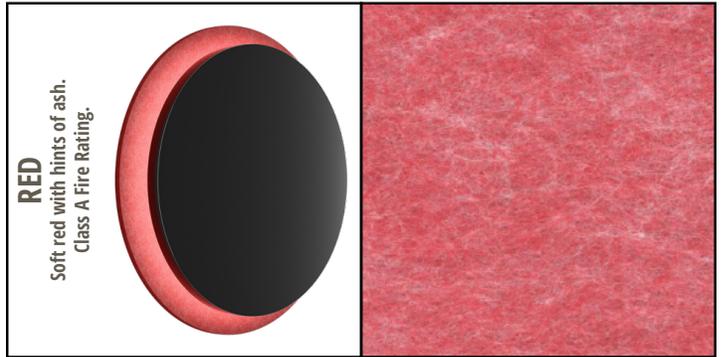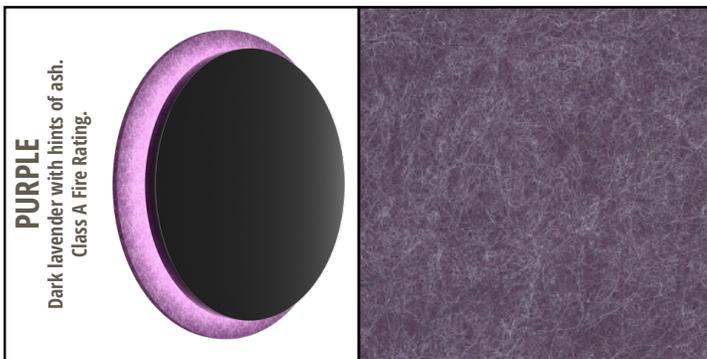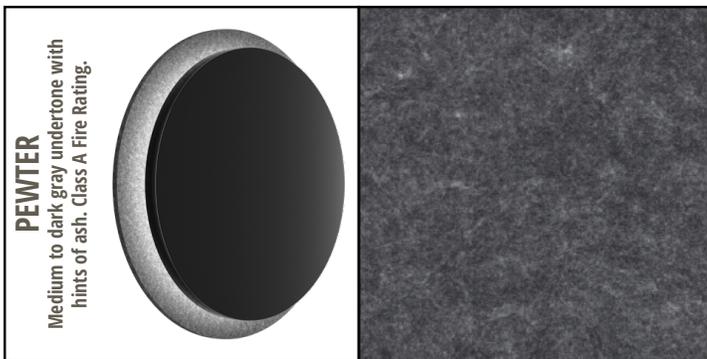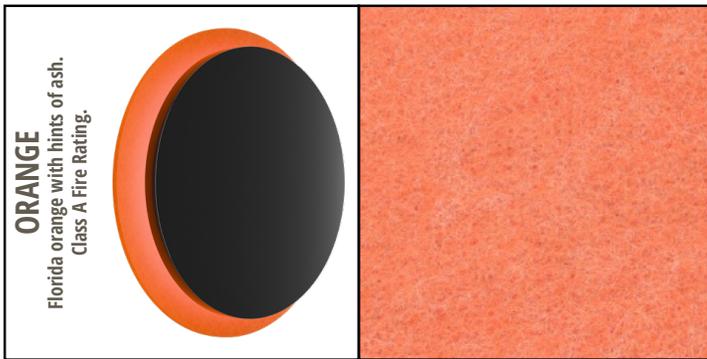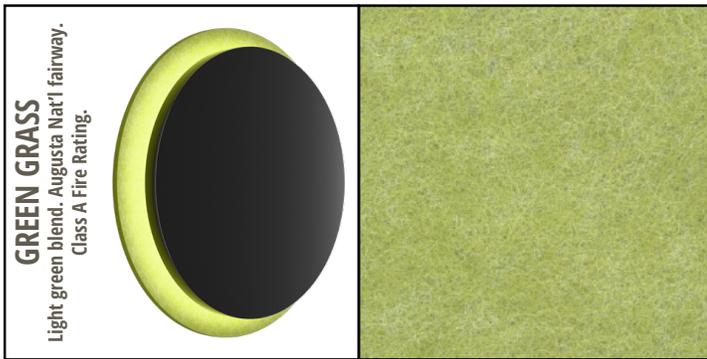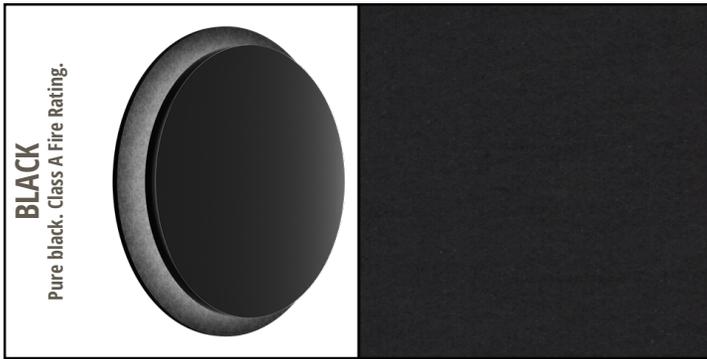

Specifications and dimensions subject to change without notice.
 Consult your Brownlee Lighting representative for availability and ordering information.