



### 1240 LED

A simple spinoff from our popular Trace collection, Trace-Trim includes an accessory plate with soft corners to bring more substance to your environment. Intended for bathroom vanity applications, hallways, lobbies, and more. Contact factory for additional lengths. To see this product without trim, refer to Model #: 5200 (1', 2', 3' sizes).

### FINISHES



TRACE TRIM

STANDARD SPECIFICATIONS

FIXTURE ASSEMBLY

Ultra compact 1.25" dia. tube profile. Assembly is comprised of an aluminum extrusion with die-cast aluminum end caps and a spun aluminum canopy. No visible hardware other than a single set-screw on the canopy. Soft corner backplate trim for added style. High-quality extruded frosted acrylic diffuser. UV stabilized.

LED PERFORMANCE

3500K standard, 90+ CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs  
Amperage rated @ 110V input. Operating ambient temperature: 25°C / 77°F Max.  
Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

H09: 9W nominal, 0.08A input – 840 lm. Dimmable (0-10V). 120-277V.

MOUNTING

Fixture mounts to a 4" x 1.5" deep\* octagonal j-box (not included - by others).  
\*Driver stored in j-box as a standard offering. 1.5" minimum depth j-box required.  
Refer to Options section for Extended Canopy (EXT) if driver cannot be mounted in j-box.  
Fixture assembly ships pre-assembled for simplified installation. Indoors only. Vertical or horizontal.

FINISH

Durable Powdercoat in your choice of finish.


WARRANTY

5 year limited warranty on this LED product. Consult factory for details.



**STANDARD**  
Driver located inside of 4" x 1.5" d octagonal j-box (by others).

**EXT OPTION**  
Driver mounts inside of canopy. Refer to Options section.

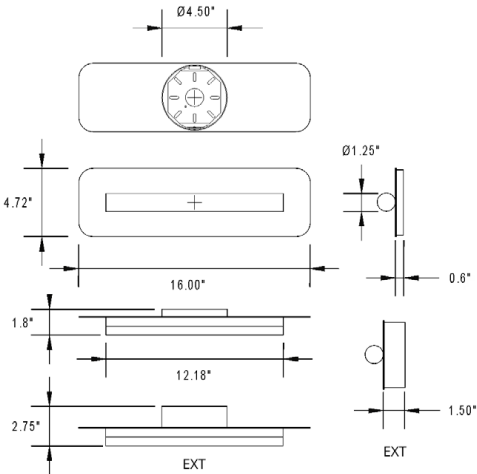

DAMP



ORDERING INFORMATION

1240				
Model	2.	3.	4.	5. (if required)
2. FINISH	3. WATTAGE	4. COLOR TEMPERATURE	5. AVAILABLE OPTIONS	
<b>BL</b> Black <b>BZ</b> Bronze <b>WH</b> White <b>MG</b> Metallic Gold	<b>H09</b> 9W H Series LED	<b>35K</b> 3500K standard color temperature <b>30K</b> 3000K color temperature <b>40K</b> 4000K color temperature  Note: 27K available, contact factory, non-returnable.	<b>BAC<sup>1</sup></b> Buy American Compliant (BAA) <b>DTR<sup>4</sup></b> Triac (Line Voltage) Dimming (120V) <b>EXT</b> Extended Canopy (Driver In Canopy) Canopy dimensions: 4.5" dia. x 1.5" d Total fixture depth: 2.75" d  <b>FCL<sup>7</sup></b> French Canadian Labels	

Universal Footnotes (only applies if superscript is shown in Options section): (0) 90R - All LEDs/CCTs are being transitioned to 90 CRI standard over 2025. Inquire for this model's availability. (1) BAC/BAB - www.brownlee.com/resources/usa. (2) BBI/BBC - cannot combine with ECW or EXT. (3) BLD - integral microwave motion sensor (step-dim). Cannot combine with DTR. (4) DTR - cannot combine with BLD. (5) ECW - cannot combine with BBI, BBC, or DTR. (7) FCL - cannot combine with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs. (10) PCH/PC4 - cannot combine with BLD or OCC.  
Add'l Notes: \*\*BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F.  
\*\*BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%.  
2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Config. via onboard dip switches.  
Specifications subject to change without notice.