

AVENUE

STANDARD SPECIFICATIONS

FRAME

The injection molded styrene compound is noted for its durability and strength. The frame walls are 0.080" thick, and the color is uniform throughout.

DIFFUSER

Translucent, UV stabilized white acrylic, injection molded to the shape of its frame. The diffuser is installed in the frame with hardware.

PAN

Formed aluminum design, finished in a powder coat high reflectance white paint.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
 Amperage rated @ 110V input
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

- B06 - 6W nominal, .05 A input - 427 lm. Non-dimming.
- B12 - 12W nominal, .10 A input - 844 lm. Dimmable (0-10V).
- C09 - 9W nominal, .10 A input - 595 lm. Dimmable (0-10V).
- C17 - 16W nominal, .15 A input - 1220 lm. Dimmable (0-10V).
- C24 - 23W nominal, .20 A input - 1674 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included.

FINISH

The 1375 series is available in standard molded nickel tone or bronze. Optional finishes include all Brownlee paints.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

ORDERING INFORMATION

1375 - _____
 Model 2. 3. 4. 5. (if required)

2. FINISH

- STANDARD**
- NT** Nickel Tone
- OPTIONAL**
- BL** Black
- BZ** Bronze
- GM** Gun Metal
- MB** Metallic Bronze
- PL** Platinum
- WH** White

CUSTOM

Provide color sample or RAL code to match

3. WATTAGE

- B06** 6W B Series LED
- B12** 12W B Series LED
- C09** 9W C Series LED
- C17** 16W C Series LED
- C24** 23W C Series LED


4. COLOR TEMPERATURE

- 35K** 3500K standard color temperature
- 27K** 2700K color temperature
- 30K** 3000K color temperature
- 40K** 4000K color temperature

5. AVAILABLE OPTIONS

- 90R⁰** 90 CRI (3000K only)
- BAC¹** Buy American Compliant
- DTR⁴** Triac (Line Voltage) Dimming (120V) (All except B06)
- ES⁶** ENERGY STAR® (Not available in 90 CRI)
- FCL⁷** French Canadian Labels
- T24⁹** Title 24 JA8 Compliant (B12 & C24 in 3000K only)

PROJECT:
MODEL #:
FIXTURE TYPE:

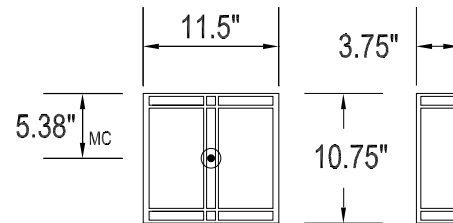

DAMP



Notes: (0) 90R - cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW, EXT, or T24. (3) BLD - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (4) DTR - cannot be combined with BLD or T24. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC or T24. (8) OCC - integral ON/OFF occupancy sensor. (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI, BBC, BBS, BLD, DTR, ES, or FCL. (10) BBS - cannot be combined with BLD, ECW, EXT, OCC, or T24. (11) PCH/PC4 - cannot be combined with BLD or OCC.
Add'l Notes: *BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. **BLD - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.

Specifications and dimensions subject to change without notice.
 Consult your Brownlee Lighting representative for availability and ordering information.