

2061 LED

The modern SPIN features high efficacy performance and is perfect for corridors, units and plenty of other general lighting applications. Tool-free twist-lock diffuser design with two styles to choose from and no exposed hardware. Refer to the 2081 for a similar look offered in larger sizes.

NEW

- 18" dia. size now available.
- Integral Battery Backup now available (both sizes).
- Extended Housing (EXT) now standard on Battery Backup option and Occupancy Sensor + Bi-Level Dimming options.

CUSTOMIZE



SPIN

STANDARD SPECIFICATIONS

HOUSING

Sturdy cold rolled steel formed spinning. No exposed hardware on spinning wall.

DIFFUSER

Translucent, UV stabilized, white acrylic. Diffuser is vacuum formed and features a secure tool-free "twist-lock" installation method.

MOUNTING

Directly to j-box (by others). Mounting hardware included. Indoors only. Extended housing option (EXT) may be used for side-fed conduit entry but must be drilled in the field and is thus non-returnable.

FINISH

The standard finish is a plated brushed nickel. Options include all Brownlee finishes.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs Amperage rated @ 110V input. Operating ambient temperature: -20°C / -4°F - 40°C / 104°F Uses RoHS compliant electrical components. Delivered 3500K lumens noted.

14 Size: R11 - 11W nominal, .09 A input - 1094 lm. Dimmable (0-10V).

14 Size: R18 - 18W nominal, .15 A input - 1749 lm. Dimmable (0-10V).

14 Size: R22 - 22W nominal, .19 A input - 2061 lm. Dimmable (0-10V).

18 Size: R23 - 23W nominal, .19 A input - 2105 lm. Dimmable (0-10V).

18 Size: R34 - 34W nominal, .28 A input - 3100 lm. Dimmable (0-10V).

18 Size: R49 - 49W nominal, .41 A input - 4115 lm. Dimmable (0-10V).


WARRANTY

5 year limited warranty on this LED product. Consult factory for details.


PROJECT:

MODEL #:

FIXTURE TYPE:

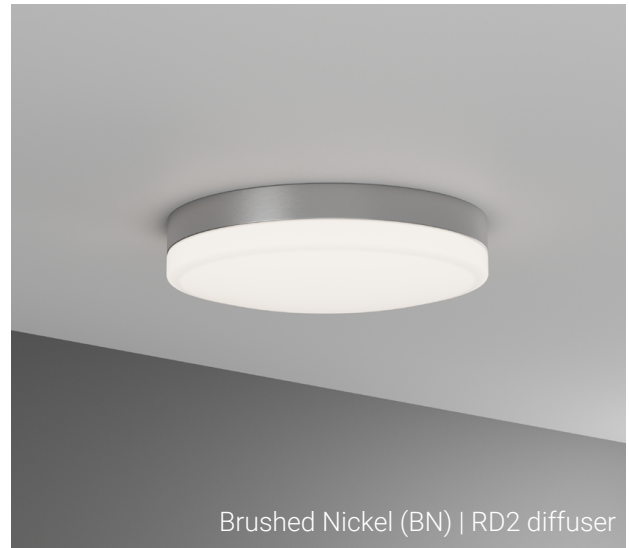

Brushed Nickel (BN) | RD2 diffuser

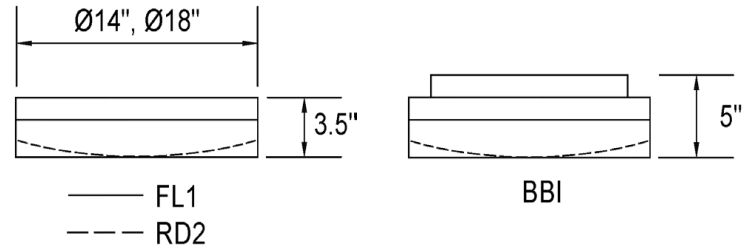

DAMP



ORDERING INFORMATION

2061		2.	3.	4.	5.	6.	7. (if required)
Model							
2. SIZE							
14	14" dia.						
18	18" dia.						
3. FINISH							
STANDARD							
BN	Brushed Nickel						
OPTIONAL							
BL	Black						
BZ	Bronze						
BU	Pastel Blue (RAL 5024)						
GN	Pastel Green (RAL 6019)						
MG	Metallic Gold						
NT	Nickel Tone						
RD	Red (RAL 3020)						
WH	White						
YL	Yellow (RAL 1018)						
4. WATTAGE							
14 SIZE							
R11	11W R Series LED						
R18	18W R Series LED						
R22	22W R Series LED						
18 SIZE							
R23	23W R Series LED						
R34	34W R Series LED						
R49	49W R Series LED						
5. DIFFUSER							
FL1	Style 1 Flat Diffuser						
RD2	Style 2 Round Diffuser						
*Note: RD1 has been discontinued.							
6. COLOR TEMPERATURE							
35K	3500K standard color temp.						
27K	2700K color temp.						
30K	3000K color temp.						
40K	4000K color temp.						
7. AVAILABLE OPTIONS							
90R ⁹	90 CRI (30K & 35K only)						
BAC ¹	Buy American Compliant						
BBI ^{2*}	Integral Battery Backup (8W) (Requires extended housing) (Adds 1.50" to depth) <i>Battery must be connected to continuous power supply within 7 Mo. of shipping. See Warranty Note 3.</i>						
BLD ^{3**}	Bi-Level Dimming (Requires extended housing) (Adds 1.50" to depth)						
DTR ⁴	Triac (Line Voltage) Dimming (120V)						
ES ⁶	ENERGY STAR [®] (Not available in 90 CRI)						
EXT	Extended Housing (Intended to match BBI extension) (Adds 1.50" to depth). Contact factory if using for conduit entry.						
FCL ⁷	French Canadian Labels						
OCC ⁸	Occupancy Sensor (Requires extended housing) (Adds 1.50" to depth)						
T24 ⁹	Title 24 JA8 Compliant (30K & 35K only)						

Universal Footnotes (only applies if option is listed on spec sheet): (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with ES. (10) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** *BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F. **BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Configurable via onboard dip switches.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.