

SHADER DEEP

STANDARD SPECIFICATIONS

SHADE

The shade is constructed from traditional lampshade material with a polyethylene liner, wrapped around a steel frame. It is available in multiple materials, divided into two pricing tiers.

TRIM

Cold rolled steel stem and canopy. The lower cover is held in place with a solid brass finial. All trim pieces available in all Brownlee finish.

DIFFUSER

A white acrylic cover is located on the bottom of the shade with an optional cover for the top.

HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
Amperage rated @ 110V input
Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

3500K delivered lumens noted. Consult Brownlee.com for performance of all CCTs.
C49 - 45W nominal, .40 A input - 4265 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included.


FINISH

The 2068 series is available in all Brownlee paint finishes as a standard offering.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:
MODEL #:
FIXTURE TYPE:

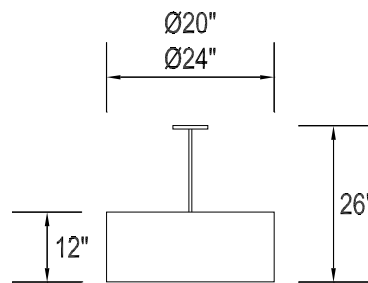

NT finish, BK1 diffuser



DAMP



ORDERING INFORMATION

2068	-	-	-	-	-	-	-	-	-	-
Model	2.	3.	4.	5.	6.	7.	(if required)			

2. SIZE	3. FINISH	4. WATTAGE	5. DIFFUSER	6. COLOR TEMPERATURE
20 20" dia.	STANDARD	C49 45W C Series LED	TIER 1	35K 3500K standard color temperature
24 24" dia.	BL Black		SN1 Satin Weave - White	27K 2700K color temperature
	BZ Bronze		SN2 Satin Weave - Ivory	30K 3000K color temperature
	GM Gun Metal		TIER 2	40K 4000K color temperature
	MB Metallic Bronze		GR1 Grasscloth - Natural	
	MG Metallic Gold		BK1 Black Linen	
	NT Nickel Tone			
	PL Platinum			
	WH White			
	CUSTOM			
	Provide color sample or RAL code to match			

7. AVAILABLE OPTIONS

90R⁹	90 CRI (3000K only)
BAC¹	Buy American Compliant
DTR⁴	Triac (Line Voltage) Dimming (120V)
ES⁶	ENERGY STAR® (Not available in 90 CRI)
FCL⁷	French Canadian Labels
SVL	Swivel Canopy / Slope Ceiling
T24⁹	Title 24 JA8 Compliant (3000K only)

ACCESSORIES (field installed - order separately)	
390002xx	SSM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)
210002WHA	Top Cover Set: 20 size, White Acrylic
210003WHA	Top Cover Set: 24 size, White Acrylic

Universal Footnotes (only applies if option is listed on spec sheet): (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with ES. (10) PCH/PCA - cannot be combined with BLD or OCC. **Add'l Notes:** *BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F. **BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Configurable via onboard dip switches. **Specifications and dimensions subject to change without notice.** Consult your Brownlee Lighting representative for availability and ordering information.