



WHL diffuser




WHL diffuser

2322 LED

The 2322 is a decorative yet functional flush mount with several fabric options to choose from. Peruse our fabric offering in the resources section of the website for a variety of coordinating fabric pendants and sconces.

TRIM FINISHES



FABO

STANDARD SPECIFICATIONS

PAN

Cold rolled steel, formed in a die, finished with an electroplated brushed nickel coating that will withstand most nicks and scratches.

DIFFUSER

Translucent, UV stabilized white acrylic. The drum shape features a fabric material bonded to the walls, allowing for ease of cleaning with a dry or damp cloth. You can choose from a selection of fabrics.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
Amperage rated @ 110V input
Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

B12 - 12W nominal, .10 A input - 1547 lm. Dimmable (0-10V).
C17 - 16W nominal, .15 A input - 2235 lm. Dimmable (0-10V).
C24 - 23W nominal, .20 A input - 3066 lm. Dimmable (0-10V).

MOUNTING

The 2322 is designed to be mounted directly to a j-box (by others). Mounting hardware included.

FINISH

The standard finish is a sturdy electroplated brushed nickel. Options include all Brownlee paint finishes. Plated finishes such as Brushed Nickel are suitable for indoor applications only. Installation outdoors voids the Brownlee Limited Warranty.


WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:
MODEL #:
FIXTURE TYPE:



BN finish, GYL diffuser

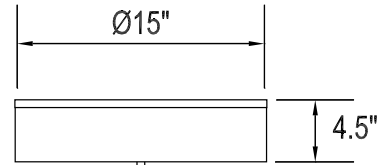

DAMP



ORDERING INFORMATION

2322 - Model - 2. - 3. - 4. - 5. - 6. (if required)

2. FINISH

STANDARD
BN Brushed Nickel

OPTIONAL
BL Black
BZ Bronze
GM Gun Metal
MB Metallic Bronze
MG Metallic Gold
NT Nickel Tone
PL Platinum
WH White

CUSTOM
Provide color sample or RAL code to match

3. WATTAGE

B12 12W B Series LED
C17 16W C Series LED
C24 23W C Series LED

4. DIFFUSER

WHA White Acrylic
GYL Grey Linen
NAL Natural Linen
WBK Woven Black
WHL White Linen

Note: MAL & ROW - have been discontinued on this model - contact factory for availability.

5. COLOR TEMPERATURE

35K 3500K standard color temperature
27K 2700K color temperature
30K 3000K color temperature
40K 4000K color temperature

6. AVAILABLE OPTIONS

90R⁰ 90 CRI (3000K only)
BAC¹ Buy American Compliant
BLD^{3}** Bi-Level Dimming
DTR⁴ Triac (Line Voltage) Dimming (120V)
ES⁶ ENERGY STAR® (Not available in 90 CRI)
FCL⁷ French Canadian Labels
OCC⁸ Occupancy Sensor
T24⁹ Title 24 JA8 Compliant (B12 & C24 in 3000K only)

Universal Footnotes (only applies if option is listed on spec sheet): (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with ES. (10) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** *BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F. **BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Configurable via onboard dip switches. **Specifications and dimensions subject to change without notice.**

Consult your Brownlee Lighting representative for availability and ordering information.