



White Acrylic (WHA) diffuser

DIFFUSER

The drum features a high quality UV stabilized white acrylic outer shell. The base (bottom) of the drum features an inset section and is constructed with high transmission white acrylic. The fixture can be cleaned with a damp cloth and mild detergent if needed.

HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
 Amperage rated @ 110V input
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

- 15 Size: R11 - 11W nominal, .09 A input - 1619 lm. Dimmable (0-10V).
- 15 Size: R18 - 18W nominal, .15 A input - 2588 lm. Dimmable (0-10V).
- 15 Size: R22 - 22W nominal, .19 A input - 3050 lm. Dimmable (0-10V).
- 20 Size: R23 - 23W nominal, .19 A input - 2977 lm. Dimmable (0-10V).
- 20 Size: R34 - 34W nominal, .28 A input - 4387 lm. Dimmable (0-10V).
- 20 Size: R49 - 49W nominal, .41 A input - 5828 lm. Dimmable (0-10V).
- 24 Size: R34 - 34W nominal, .28 A input - 4569 lm. Dimmable (0-10V).
- 24 Size: R49 - 49W nominal, .41 A input - 6071 lm. Dimmable (0-10V).
- 30 Size: R34 - 34W nominal, .28 A input - 4352 lm. Dimmable (0-10V).
- 30 Size: R49 - 49W nominal, .41 A input - 5782 lm. Dimmable (0-10V).

*Testing performed on White Acrylic shade option. WBK fabric decreases lumen output.

MOUNTING

Directly to j-box (by others). Mounting hardware included.

SUSPENSION SYSTEM

The 2616 Series is available in multiple finishes and four suspension methods:

CC1 - Cord & Single Cable: Both the power cord and aircraft cable can be trimmed in the field. See optional ordering code CE1 and CE2 for extended 10' and 20' drops. Recommended for pendants up to 36"Ø only.

CC3 - Cord & Three Cable: Both the power cord and aircraft cables can be trimmed in the field. See optional ordering code CE1 and CE2 for extended 10' and 20' drops.

SCM - Stem & Cable Mount: Steel stem in your choice of finish with three aircraft cables. The standard overall height (OAH) can be extended with additional stem sections in 1' and 2' intervals - see accessories section.

SSM - Single Stem Mount: Traditional pendant style. Steel stem in your choice of finish. The standard overall height (OAH) can be extended with additional stem sections in 1' and 2' intervals - see accessories section. Recommended for pendants up to 36"Ø only.


WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

FAUXNUT PENDANT

PROJECT:
MODEL #:
FIXTURE TYPE:

DIMENSIONAL DRAWING

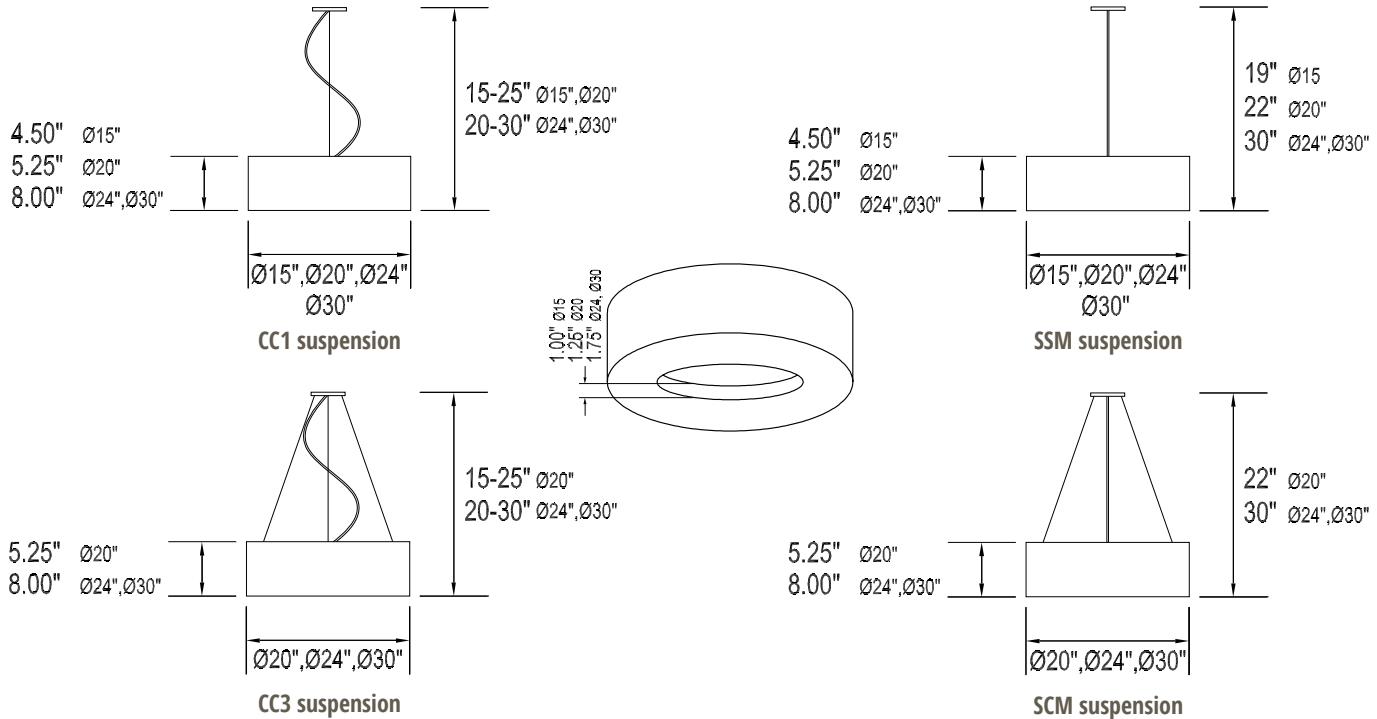

ORDERING INFORMATION

2616

Model 2. 3. 4. 5. 6. 7. 8. (if required)

2. SIZE	3. FINISH	4. WATTAGE	5. DIFFUSER	7. COLOR TEMPERATURE
15 15" dia.	CC1 & CC3	15 SIZE	WHA White Acrylic WBK Woven Black	35K 3500K standard color temperature
20 19.25" dia.	BL Black	R11 11W R Series LED		27K 2700K color temperature
24 24" dia.	NT Nickel Tone	R18 18W R Series LED		30K 3000K color temperature
30 30" dia.	WH White	R22 22W R Series LED		40K 4000K color temperature
	SCM & SSM	20 SIZE	6. SUSPENSION	8. AVAILABLE OPTIONS
	BL Black	R23 23W R Series LED	CC1 Cord & Single Cable	90R⁰ 90 CRI (30K & 35K only)
	BZ Bronze	R34 34W R Series LED	CC3 Cord & Three Cable (All except 15 size)	BAC¹ Buy American Compliant
	GM Gun Metal	R49 49W R Series LED	SCM Stem & Cable Mount (All except 15 size)	CE1 3' - 10' Cord/Cable Extension (CC1 & CC3 only)
	MB Metallic Bronze		SSM Single Stem Mount	CE2 10' - 20' Cord/Cable Extension (CC1 & CC3 only)
	MG Metallic Gold	24 & 30 SIZE		DTR⁴ Triac (Line Voltage) Dimming (120V)
	NT Nickel Tone	R34 34W R Series LED		ES⁶ ENERGY STAR [®] (Not available in 90 CRI)
	PL Platinum	R49 49W R Series LED		FCL⁷ French Canadian Labels
	WH White			T24⁹ Title 24 JA8 Compliant (30K & 35K only)

ACCESSORIES (field installed - order separately)

390001xx	SCM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)
390002xx	SSM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)
320029WHA	Top Cover Set: 24 size, White Acrylic
320030WHA	Top Cover Set: 30 size, White Acrylic

Universal Footnotes (only applies if option is listed on spec sheet): (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with ES. (10) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** *BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F. **BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Configurable via onboard dip switches. **Specifications and dimensions subject to change without notice.**
Consult your Brownlee Lighting representative for availability and ordering information.