



36" size, White Acrylic diffuser (WHA)

2630 LED

LED PERFORMANCE

120-277V - 3500K, 90+ CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
 Amperage rated @ 110V input. Operating ambient temperature: -20°C / -4°F - 40°C / 104°F. Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs. Modified lumen packages available.

LOW OUTPUT

24" & 30": H30 - 30W nominal, .27 A input - 3850 lm. Dimmable (0-10V).

36": H70 - 70W nominal, .59 A input - 7524 lm. Dimmable (0-10V).

48": H110 - 110W nominal, .94 A input - 11970 lm. Dimmable (0-10V).

HIGH OUTPUT

24" & 30": H63 - 63W nominal, .53 A input - 6689 lm. Dimmable (0-10V).

36": H136 - 136W nominal, 1.20 A input - 15048 lm. Dimmable (0-10V).

48": H215 - 215W nominal, 1.86 A input - 23947 lm. Dimmable (0-10V).

DIFFUSER

The 6" h low profile 2630 series drum is available in two UV stabilized configurations - White Acrylic, and Encased White Linen. Drum can be wiped down with a non-abrasive commercial cleaning solution, including bleach/ammonia, and a soft cloth.

White Acrylic (WHA): one-piece drum. Both the outer wall and base (bottom) diffuser are constructed of high transmission matte white acrylic.

Encased White Linen (EWL): one-piece drum. The outer wall consists of fabric which is bonded between two layers of acrylic. The base (bottom) diffuser is constructed of high transmission matte white acrylic. The result is a sustainable fabric drum which can be effortlessly wiped down when needed.

HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white. The housing covers the entire top surface of the drum. No need for top cover.

SUSPENSION SYSTEM

CC1 - Cord & Single Cable: Both the power cord and aircraft cable can be trimmed in the field. See optional ordering code CE1 and CE2 for extended 10' and 20' drops. (24" & 30" only)

CC3 - Cord & Three Cable: Both the power cord and aircraft cables can be trimmed in the field. See optional ordering code CE1 and CE2 for extended 10' and 20' drops.

SSM - Single Stem Mount: Traditional pendant style. Steel stem in your choice of finish. The standard overall height (OAH) can be extended with additional stem sections in 1' and 2' intervals - see accessories section. (24" & 30" only)

SCM - Stem & Cable Mount: Steel stem in your choice of finish with three aircraft cables. The standard overall height (OAH) can be extended with additional stem sections in 1' and 2' intervals - see accessories section.

MOUNTING

24" & 30" sizes: directly to j-box (by others). Hardware included.

36" & 48" sizes: anchored to ceiling. Anchor plate included. Anchoring hardware not included.

Refer to model #: 2370 for a surface mount version of this product.


WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

CLEAN6 PENDANT

STANDARD SPECIFICATIONS - 2630 PENDANT

| |
|----------------------|
| PROJECT: |
| MODEL #: |
| FIXTURE TYPE: |

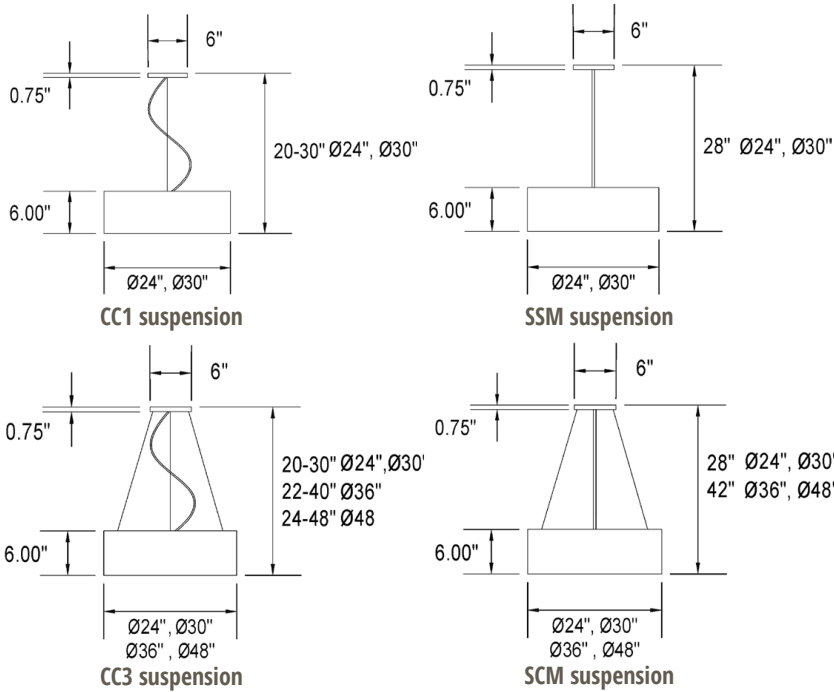

ORDERING INFORMATION



2630

Model 2. 3. 4. 5. 6. 7. 8. (if required)

| 2. SIZE | 3. FINISH | 4. WATTAGE | 5. DIFFUSER | 7. COLOR TEMPERATURE |
|----------------|---|-------------------------------|--------------------------------|--|
| 24 24" dia. | STANDARD | 24 & 30 SIZE | EWL Encased White Linen | 35K 3500K standard color temperature |
| 30 30" dia. | CC1 & CC3 | H30 30W H Series LED | WHA White Acrylic | 30K 3000K color temperature |
| 36 36" dia. | BL Black | H63 63W H Series LED | | 40K 4000K color temperature |
| 48 48" dia. | NT Nickel Tone | 36 SIZE | 6. SUSPENSION | |
| | WH White | H70 70W H Series LED | CC1 Cord & Single Cable | 8. AVAILABLE OPTIONS |
| | SCM & SSM | H136 136W H Series LED | (24 & 30 size only) | AMF Antimicrobial Finish (BL, NT, WH only) |
| | BL Black | 48 SIZE | CC3 Cord & Three Cable | (See AMF note) |
| | BZ Bronze | H110 110W H Series LED | SSM Single Stem Mount | BAC¹ Buy American Compliant |
| | GM Gun Metal | H215 215W H Series LED | (24 & 30 size only) | BBI^{2*} Integral Battery Backup (8W) |
| | MB Metallic Bronze | | SCM Stem & Cable Mount | <i>Battery must be connected to continuous power supply within 7 Mo. of shipping. See Warranty Note 3.</i> |
| | MG Metallic Gold | | | CE1 3' - 10' Cord/Cable Extension |
| | NT Nickel Tone | | | (CC1 & CC3 only) |
| | PL Platinum | | | CE2 10' - 20' Cord/Cable Extension |
| | WH White | | | (CC1 & CC3 only) |
| | ANTIMICROBIAL | | | DTR⁴ Triac (Line Voltage) Dimming (120V) |
| | Available in a select number of finishes. | | | FCL⁷ French Canadian Labels |
| | Refer to the Options section of this sheet for details ("AMF"). | | | |

ACCESSORIES (field installed - order separately)

| | |
|-----------------|--|
| 390001xx | SCM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx) |
| 390002xx | SSM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx) |

AMF Note: Antimicrobial powder coat is applied to the exposed metal fixture parts and can inhibit the growth of mildew and spoilage causing microbes on the finish.

Universal Footnotes (only applies if option is listed on spec sheet): (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JAB labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with ES. (10) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** *BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F. **BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Configurable via onboard dip switches. **Specifications and dimensions subject to change without notice.** Consult your Brownlee Lighting representative for availability and ordering information.