



Bronze Finish



Black Finish

## 7115 LED

CAPSULE is a wet location rated sconce offered in two sizes. While intended for exterior facades, it also used in commercial interior applications such as elevator lobbies, hallways, and meeting rooms. Heavy duty aluminum construction, uniformly illuminated frosted acrylic diffuser, stainless steel hardware, dedicated 120-277V LED components - all standard. CAPSULE is available in two form factors: round (model #: 7110) and square (model #: 7115).

## FINISHES



# CAPSULE-SQ

## STANDARD SPECIFICATIONS

### HOUSING

Heavy duty commercial-grade assembly is constructed of formed aluminum (0.080" thickness) with welded ends. Two countersunk stainless steel fasteners are regressed behind the trim at each end of the fixture. No exposed hardware on the sides of the fixture. Rear mount plate includes factory installed closed-cell foam gasket.

### DIFFUSER

UV stabilized frosted acrylic, form molded, stout thickness of 0.090" throughout.

### LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 90+ CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs  
 Amperage rated @ 110V input  
 Operating ambient temperature: -20°C / -4°F - 60°C / 140°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

15" Size: H08 - 8W nominal, .07 A input - 688 lm. Dimmable (0-10V).  
 15" Size: H16 - 16W nominal, .14 A input - 1370 lm. Dimmable (0-10V).  
 26" Size: H16 - 16W nominal, .14 A input - 1684 lm. Dimmable (0-10V).  
 26" Size: H32 - 32W nominal, .27 A input - 3158 lm. Dimmable (0-10V).

### MOUNTING

Directly to 4x4 j-box (by others). 26" size contains thru-holes for anchoring located toward top and bottom of mount plate and should be utilized to achieve a firm connection to the surface throughout (anchoring hardware by others).


### FINISH

All 7115 parts are prepared using a three step pre-treatment/sealing process, followed by a powder coat primer prior to applying any of the Brownlee finishes.

### WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

<b>PROJECT:</b>
<b>MODEL #:</b>
<b>FIXTURE TYPE:</b>

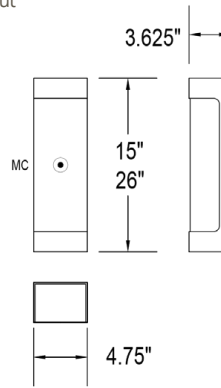

WET



## ORDERING INFORMATION

**7115** - \_\_\_\_\_  
 Model                      2.                      3.                      4.                      5.                      6. (if required)

### 2. SIZE

15" 15" length  
 26" 26" length

### 3. FINISH

**BL** Black  
**BZ** Bronze  
**MB** Metallic Bronze  
**NT** Nickel Tone  
**WH** White  
  
**TB** Textured Black  
**TG** Textured Grey  
**TW** Textured White

Note: TB, TG, TW are ultra fine textured matte finishes. Contact your local representative for color swatches.

### 4. WATTAGE

**15 SIZE**  
**H08** 8W H Series LED  
**H16** 16W H Series LED  
  
**26 SIZE**  
**H16** 16W H Series LED  
**H32** 32W H Series LED

### 5. COLOR TEMPERATURE

**35K** 3500K standard color temperature  
**30K** 3000K color temperature  
**40K** 4000K color temperature

### 6. AVAILABLE OPTIONS

**BAC**<sup>1</sup> Buy American Compliant  
**DTR**<sup>4</sup> Triac (Line Voltage) Dimming (120V)  
**ECW**<sup>5</sup> Extreme Cold Weather (-40°C / -40°F min.)  
**ES**<sup>6</sup> ENERGY STAR® (All except H08)  
**FCL**<sup>7</sup> French Canadian Labels  
**T24**<sup>9</sup> Title 24 JA8 Compliant (H16 & H32 only)

**Universal Footnotes (only applies if option is listed on spec sheet):** (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with ES. (10) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** \*BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F. \*\*BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Configurable via onboard dip switches.

### Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.

