

# FLEX-BAR [SOLID]

## STANDARD SPECIFICATIONS

### HOUSING

The modern design is a one piece housing assembly with the diffuser held in place by formed rails. The assembly consists of formed, cold rolled steel parts that welded and fastened with hardware. The decorative trim is cut from 1/4" steel, and fastened directly to the base housing. Two decorative solid steel diffuser panels complete the look. This fixture is not recommended for installation along coastal areas. Contact factory for further details.

### DIFFUSER

A simple white UV stabilized acrylic panel provides an understated elegance to this sleek design.

### LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 90+ CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs  
 Amperage rated @ 110V input  
 Dimming compatible - 0-10V control required  
 Operating ambient temperature: -20°C / -4°F - 50°C / 122°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

H16 - 16W nominal, .14 A input - 968 lm. Dimmable (0-10V).  
 H21 - 21W nominal, .18 A input - 1159 lm. Dimmable (0-10V).  
 H32 - 32W nominal, .26 A input - 1916 lm. Dimmable (0-10V).  
 H41 - 41W nominal, .35 A input - 2340 lm. Dimmable (0-10V).

### MOUNTING

The 7334 series is designed to be mounted directly to a j-box (by others), and additional wall anchors (by others) at the ends of the fixture.

### FINISH

The 7334 series is available in Nickel Tone as a standard, and in all Brownlee paints as an optional offering.

### WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

## ORDERING INFORMATION

**7334** - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_  
 Model                      2.                      3.                      4.                      5. (if required)

### 2. FINISH

**STANDARD**  
**NT** Nickel Tone

**OPTIONAL**  
**AB** Antique Bronze  
**AS** Antique Silver  
**BL** Black  
**BZ** Bronze  
**DB** Desert Bronze  
**GM** Gun Metal  
**MB** Metallic Bronze  
**PL** Platinum  
**WH** White

**CUSTOM**  
 Provide color sample or RAL code to match

### 3. WATTAGE



**H16** 16W H Series LED  
**H21** 21W H Series LED  
**H32** 32W H Series LED  
**H41** 41W H Series LED

### 4. COLOR TEMPERATURE

**35K** 3500K standard color temperature  
**30K** 3000K color temperature  
**40K** 4000K color temperature

### 5. AVAILABLE OPTIONS

**BAC**<sup>1</sup> Buy American Compliant  
**ES**<sup>6</sup> ENERGY STAR® (H16 & H32 Only)  
**FCL**<sup>7</sup> French Canadian Labels  
**T24**<sup>9</sup> Title 24 JA8 Compliant (H16 & H32 only)

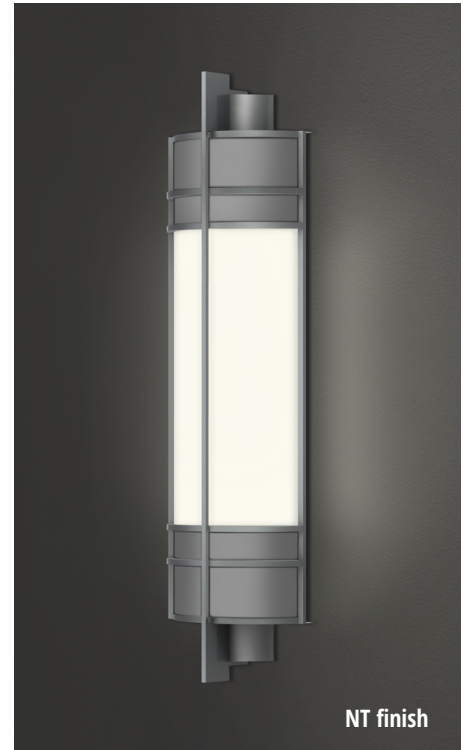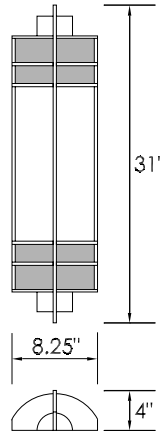

NT finish



WET



**Universal Footnotes (only applies if option is listed on spec sheet):** (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with ES. (10) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** \*BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F. \*\*BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Configurable via onboard dip switches. **Specifications and dimensions subject to change without notice.**

Consult your Brownlee Lighting representative for availability and ordering information.