

GRAND

STANDARD SPECIFICATIONS

ENDS

Molded resin acrylic, secured to the diffuser with a two part adhesive, and the diffuser assembly snaps in place over spring steel clips for tool less maintenance.

HOUSING

Cold rolled steel, die-formed assembly. The housing can be mounted horizontal or vertical.

DIFFUSER

UV stabilized white acrylic. The material can withstand minor impact without breaking.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 90+ CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
 Amperage rated @ 110V input
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

H16 - 16W nominal, .14 A input - 1763 lm. Dimmable (0-10V).

H25 - 25W nominal, .20 A input - 2603 lm. Dimmable (0-10V).

H32 - 32W nominal, .26 A input - 3490 lm. Dimmable (0-10V).

MOUNTING

Fixture uses wall anchors (by others) appropriate for the mounting surface.

FINISH

The 5150 series is available in all Brownlee paint finishes as a standard offering.


WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:
MODEL #:
FIXTURE TYPE:



BZ endcaps, WHA diffuser

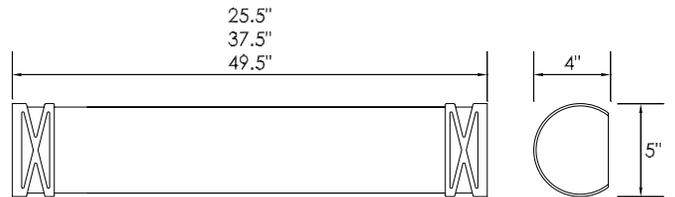

ORDERING INFORMATION



DAMP



5150 - _____
 Model 2. 3. 4. 5. 6. (if required)

2. SIZE	3. END CAPS	4. WATTAGE	5. COLOR TEMPERATURE
26 L: 25.5"	STANDARD BL Black BZ Bronze GM Gun Metal MB Metallic Bronze NT Nickel Tone PL Platinum WH White CUSTOM Provide color sample or RAL code to match	26 SIZE H16 16W H Series LED	35K 3500K standard color temperature 30K 3000K color temperature 40K 4000K color temperature
38 L: 37.5"		38 SIZE H25 25W H Series LED	6. AVAILABLE OPTIONS BAC ¹ Buy American Compliant BBI ^{2*} Integral Battery Backup (8W) (H25 & H32 only) <i>Battery must be connected to continuous power supply within 7 Mo. of shipping. See Warranty Note 3.</i> DTR ⁴ Triac (Line Voltage) Dimming (120V) ES ⁶ ENERGY STAR® (Not available in 90 CRI) FCL ⁷ French Canadian Labels T24 ⁹ Title 24 JA8 Compliant
50 L: 49.5"		50 SIZE H32 32W H Series LED	

Universal Footnotes (only applies if option is listed on spec sheet): (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with ES. (10) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** *BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F. **BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Configurable via onboard dip switches.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.